


DVA 400 H Dehumidification, Ventilation, Air Filtration System

Specifications

- Model: DVA-400H Dehumidification, Ventilation, Air Filtration System.
- Capacity: 160 pints/day, (7lbs./hr), @ 80°/60%RH
- Electrical: 110-120 VAC, 14.5 FLA Amps, 60 Hz, grounded
- Operating Temp. Range: 35°F min., 100°F max.
- Air Flow:
 - 550 CFM without external ducting
 - 425 CFM @ .30 IWG external static
 - 375 CFM @ .50 IWG external static
- Refrigerant Charge: 2 lbs., 10 oz. R-22
- Duct connections: Return duct flange, 20-5/8"W X 18-7/8"H, Outlet 10" round
- Filter Size:
 - Pleated: 2" X 19" X 21"
 - High Efficiency: 4" X 19" X 21"
- Size (Clearance):
 - 49" long x 22-1/2" wide x 20-5/8" high
- Weight: 185 pounds.

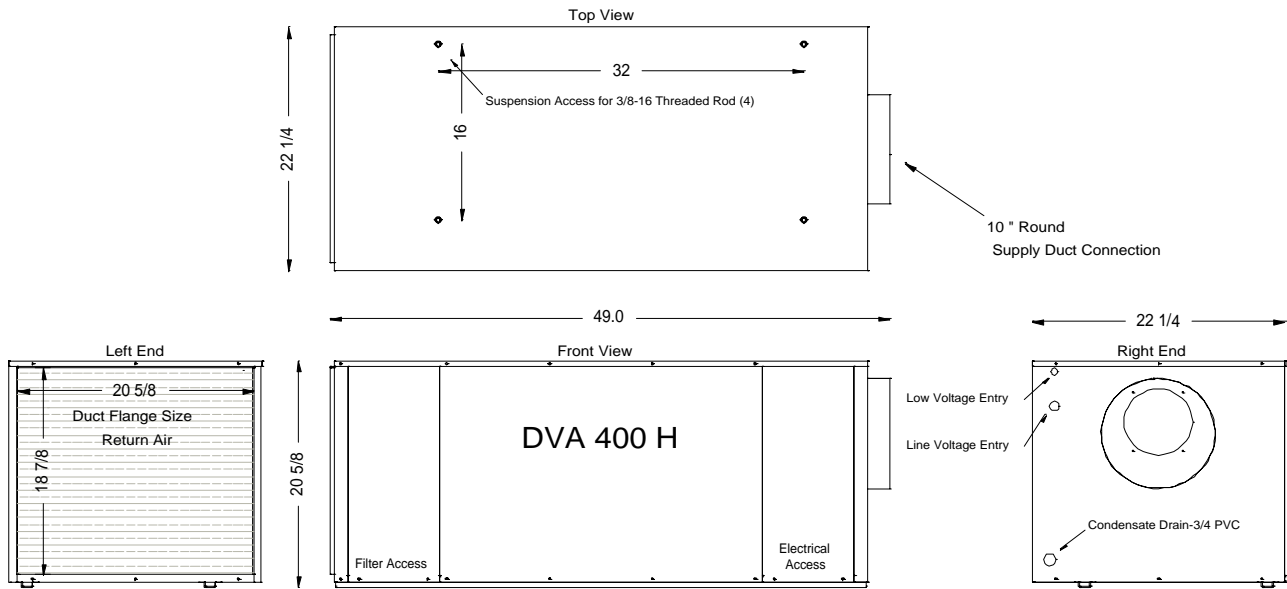

Read the installation, operation and maintenance instructions carefully **before** installing and using this unit. Proper adherence to these instructions is essential to obtain maximum benefit from the DVA-400H Dehumidification, Ventilation, and Air Filtration System.